固定连接器

DEGSON高松的固定连接器广泛应用于多个行业领域的信号、数据和电源传输，包含多种接线方式、出线方向和间距范围，我们可以根据不同的应用场景为客户提供最适合的解决方案。

PCB Terminal Blocks

DEGSON's PCB terminal blocks are widely used for signal,data and power transmission in various industries, including different kinds of connection methods, connection directions and pitch ranges, etc. We can provide the most suitable solutions for customers according to the different application occasions.

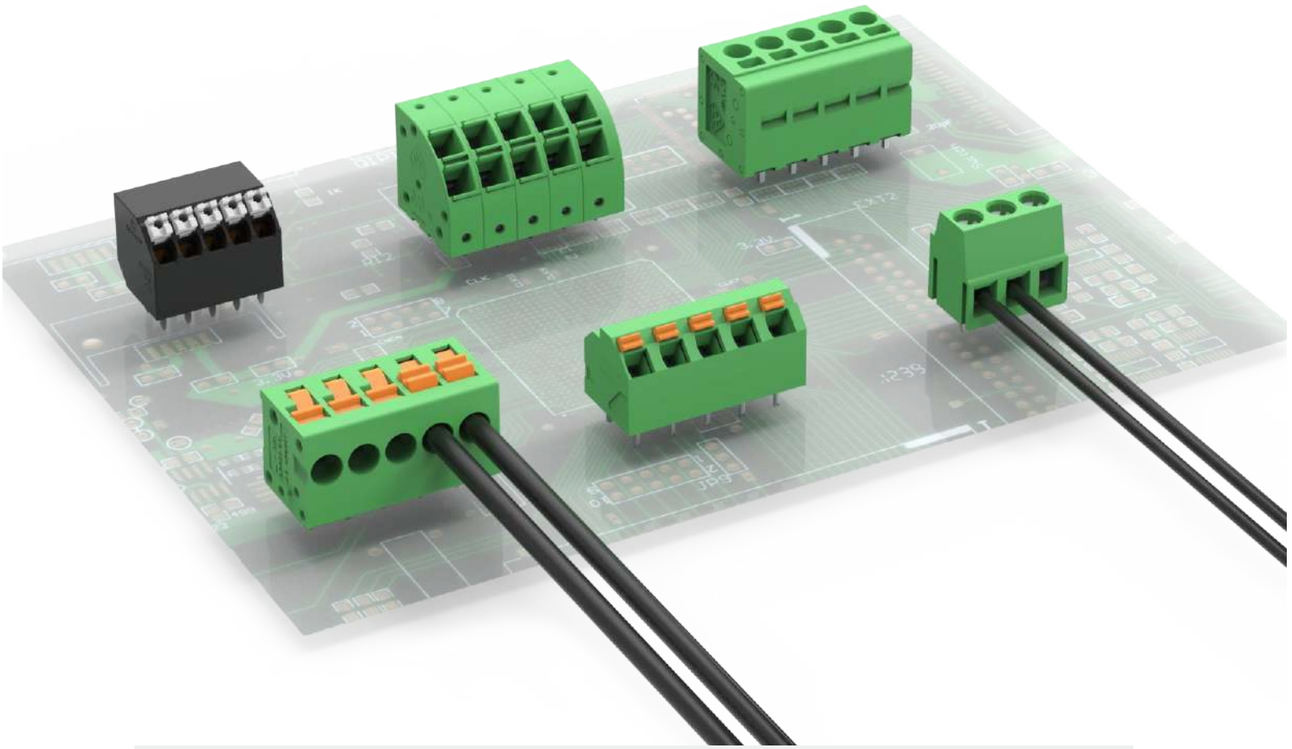

主要特点

- 包含螺钉、直插式弹簧等不同的接线方式
- 接线范围涵盖0.14mm²-35mm²
- 适用于2.5-15.0mm的间距
- 额定电压/电流最大可满足1000V/125A
- 可满足波峰焊、THR回流焊和SMT焊接工艺

Main features

- Different connection methods including screw and spring type,etc
- Cross section range:0.14mm²-35mm²
- Pitch range:2.5-15.0mm
- Rated voltage/current can up to 1000V/125A
- Suitable for wave soldering, THR and SMT soldering process

产品特点

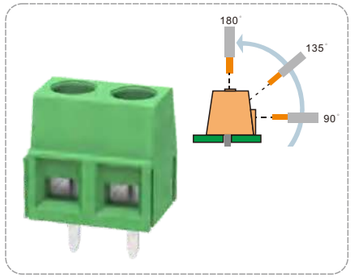

多种接线角度

灵活出线，适用于不同的布线场合

多层设计

接线密度高

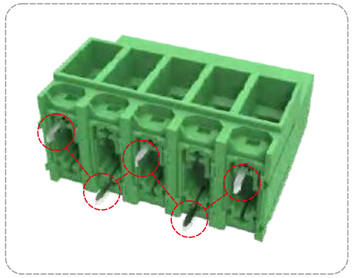

符合UL1059-600V要求

采用巧妙的"Z"型焊针设计，增加安全距离，满足工业600V要求

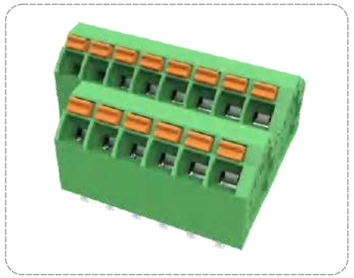

多排布局

斜面式出线方向实现PCB板上高密连接

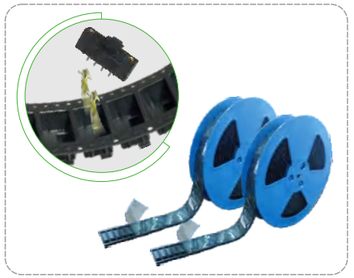

适用于SMT/THR焊接工艺

可采用卷带包装，满足客户自动化制程生产

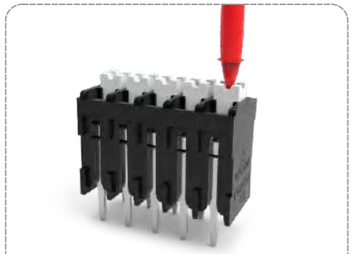

集成测试孔

能够更加安全、可靠、方便地进行电气测试和维护

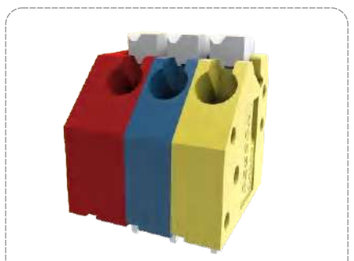

增值服务

可根据客户需求提供印字、特殊颜色等个性化定制

全自动化组装

自动化装配&检测，提升品质稳定性

拼接式模块化结构

通过侧面的锁扣，可以快速、灵活地组合成不同位数

固定式连接器，接线容量达 0.34 mm² (AWG 22)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG2001-3.0	SMT焊接	1-3	3.0	3 IEC 3 UL (B)	160 IEC 1P:600 UL (B) 2/3P:300 UL (B)	0°	直插式 弹簧连接	VDE、UL
	DG043-3.0	桥接件	1-3	3.0	3 UL (B)	/	0°	配套 DG2001-3.0	/
	DG044	取线工具	/	/	/	/	90°	配套 DG2001-3.0	/

固定式连接器，接线容量达 0.5 mm² (AWG 20)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG250-2.5	可用一字螺丝刀 进行操作	1-24	2.5	2 IEC 2 UL (B, C, D)	250 IEC 300 UL (B, C, D)	45°	直插式 弹簧连接	VDE、UL
	DG211R-2.5	/	2-24	2.5	3 IEC 3 UL (B)	160 IEC 150 UL (B)	0°	直插式 弹簧连接	UL
	DG240-2.54	/	2-24	2.54	6 IEC 4 UL (B, C, D)	130 IEC 150 UL (B, C, D)	45°	回拉式 弹簧连接	VDE、UL
	DG240W-2.54	/	2-24	2.54	6 IEC 4 UL (B, C, D)	130 IEC 150 UL (B, C, D)	45°	回拉式 弹簧连接	VDE、UL
	DG241-2.5/2.54	/	1-24	2.5/2.54	6 IEC 5 UL (B)	130 IEC 150 UL (B)	90°	回拉式 弹簧连接	VDE、UL
	DG141V-2.54	/	2-24	2.54	6 IEC 2 UL (B, C, D)	130 IEC 150 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL
	DG141R-2.54	/	2-24	2.54	6 IEC 2 UL (B, C, D)	130 IEC 150 UL (B, C, D)	0°	直插式 弹簧连接	VDE、UL
	DG2060-2.5	微型SMT贴片产品	1-8	2.5	6 IEC 5 UL (B)	160 IEC 150 UL (B)	0°	SMT 直插式 弹簧连接	VDE、UL
	DG251A-3.5	刺破式连接 适配IDC系统	2-10	3.5	6 IEC 4 UL (B)	450 IEC 300 UL (B)	0°	SMT 直插式 弹簧连接	VDE、CQC

固定式连接器，接线容量达 0.75 mm² (AWG 18)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG2002-4.0	提供SMT、THR 两种焊接工艺	1-3	4.0	9 IEC 9 UL (B)	160 IEC 1P:600 UL (B) 2/3P:300 UL (B)	0°	直插式 弹簧连接	VDE、UL
	DG250W-3.5	可用一字螺丝刀 进行操作	2-24	3.5	3 IEC 4 UL (B, C)	250 IEC 300 UL (B, C)	0°	直插式 弹簧连接	VDE、UL
	DG208-5.0	/	1-24	5.0	9 IEC 7 UL (B, D)	450 IEC 300 UL (B, D)	0°	直插式 弹簧连接	VDE、UL
	DG350-3.5/3.96	/	2/3位，可 并排安装	3.5/3.96	10 IEC 7 UL (B, D)	130 IEC 300 UL (B, D)	0°	带导线防护 的螺钉连接	VDE、UL
	DG350R-3.5/3.96	/	2/3位，可 并排安装	3.5/3.96	10 IEC 7 UL (B, D)	130 IEC 300 UL (B, D)	90°	带导线防护 的螺钉连接	VDE、UL
	DG340-3.81	/	2/3位，可 并排安装	3.81	10 IEC 7 UL (B)	130 IEC 300 UL (B)	0°	带导线防护 的螺钉连接	VDE、UL
	DG340R-3.81	/	2/3位， 可并排安装	3.81	10 IEC 7 UL (B)	130 IEC 300 UL (B)	90°	带导线防护 的螺钉连接	VDE、UL
	DG308-2.54	可带或 不带定位销	2-12	2.54	8 IEC 6 UL (B)	130 IEC 150 UL (B)	0°	带夹线体的 螺钉连接	VDE、UL
	DG220A-2.1	/	4、8	2.1	13.5 IEC	130 IEC 150 UL	0°	直插式 弹簧连接	VDE、UL
	DG220B-2.1	/	2、4、8	2.1	6 IEC 7 UL (B, D)	320 IEC 150 UL (B, D)	0°	直插式 弹簧连接	VDE、UL
	DG390-5.0	可用一字螺丝刀 进行操作	2-12	5.0	13.5 IEC 8 UL (B)	250 IEC 300 UL (B)	0°	直插式 弹簧连接	/
	DG027-4.0	桥接件	1-3	4.0	9 UL (B)	/	0°	配套 DG2002-4.0	/
	DG028	取线工具	/	/	/	/	/	配套 DG2002-4.0	/
	DG220J	焊针	1	/	6 IEC 7 UL (B, D)	320 IEC 150 UL (B, D)	/	配套 DG220B-2.1	VDE、UL
NEW	DG212VH-3.81	可用一字螺丝刀 进行操作	2-24	3.81	9 IEC 7 UL (B, D) 7 UL (C)	400 IEC 300 UL (B, D) 50 UL(C)	90°	直插式 弹簧连接	UL

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG301-5.0	/	2/3位，可并排安装	5.0	17.5 IEC 15 UL (B)	250 IEC 300 UL (B)	0°	带导线防护的螺钉连接	UL
	DG301R-5.0	/	2/3位，可并排安装	5.0	17.5 IEC 15 UL (B)	250 IEC 300 UL (B)	90°	带导线防护的螺钉连接	VDE、UL
	DG301S-5.0	/	2/3位，可并排安装	5.0	17.5 IEC 15 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	45°	带导线防护的螺钉连接	UL
	DG306-5.0	/	2/3位，可并排安装	5.0	15 IEC 10 UL (B)	250 IEC 300 UL (B)	0°	带导线防护的螺钉连接	UL
	DG126R-5.0	/	2/3位，可并排安装	5.0	10 IEC 10 UL (B)	250 IEC 300 UL (B)	90°	带导线防护的螺钉连接	UL
	DG351V-3.5	/	2/3位，可并排安装	3.5	17.5 IEC 10 UL (B, D)	200 IEC 300 UL (B, D)	0°	带导线防护的螺钉连接	UL
	DG351R-3.5	/	2/3位，可并排安装	3.5	17.5 IEC 10 UL (B, D)	200 IEC 300 UL (B, D)	90°	带导线防护的螺钉连接	UL
	DG380-3.5	/	2-24	3.5	13.5 IEC 10 UL (B, D)	200 IEC 300 UL (B, D)	0°	带夹线体的螺钉连接	UL
	DG380-3.81	/	2-24	3.81	16 IEC 12 UL (B) 10 UL (D)	200 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG380A-3.81	/	2*(2-12)	3.81	12 IEC 12 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	/
	DG381S-3.5	可提供D级 300V电压 型号 DG381S-HV-3.5	2-18	3.5	10 IEC 10 UL (B)	130 IEC 300 UL (B)	35°	带夹线体的螺钉连接	VDE、UL
	DG381S-3.81	/	2-12	3.81	10 IEC 10 UL (B)	130 IEC 300 UL (B)	35°	带夹线体的螺钉连接	VDE、UL
	DG381R-3.5	/	2-24	3.5	10 IEC 10 UL (B)	130 IEC 300 UL (B)	90°	带夹线体的螺钉连接	/
	DG381-3.5/3.81	/	2/3位，可并排安装		10 IEC 10 UL (B)	130 IEC 300 UL (B)	0°	带夹线体的螺钉连接	VDE、UL
	DG381H-3.81	/	2-16	3.81	10 IEC 10 UL (B)	130 IEC 150 UL (B)	0°	带夹线体的螺钉连接	VDE、UL

DEGSON

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG381A-3.81	/	2*(2-24)	3.81	10 IEC 12 UL (B) 10 UL (D)	130 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG381B-3.81	/	2*(2-24)	3.81	10 IEC 12 UL (B) 10 UL (D)	130 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG381A3-3.81	/	3*(2-24)	3.5	12 IEC 12 UL (B)	160 IEC 300 UL (B)	0°	带夹线体的螺钉连接	UL
	DG383-3.5	2、3位底部带固定销	2-12	3.5	12 IEC 15 UL (B)	160 IEC 300 UL (B)	90°	带夹线体的螺钉连接	UL
	DG127S-5.0/5.08	/	2-16	5.0/5.08	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	55°	带夹线体的螺钉连接	VDE、UL
	DG127-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG127-7.62	/	2/3位，可并排安装	7.62	15 IEC 12 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG127H-5.08	高型设计	2/3位，可并排安装	5.08	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE
	DG127HH-5.0	高型设计	2/3位，可并排安装	5.0	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG127A-5.0/5.08	/	4/6位，可并排安装	5.0/5.08	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG127A3-5.08	/	4/6位，可并排安装	5.08	10 IEC 12 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	UL
	DG127R-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	15 IEC 12 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG381-THR-3.5/3.81	耐高温塑料	2-8	3.5/3.81	13.5 IEC 10 UL (B)	200 IEC 150 UL (B)	0°	带夹线体的螺钉连接	UL
	DG127-THR-5.0	耐高温塑料	2-3	5.0	15 IEC 12 UL (B)	320 IEC 300 UL (B)	0°	带夹线体的螺钉连接	UL
	DG2003-6.0	SMT焊接	1-3	6.0	17.5 IEC 10 UL (B)	200 IEC 1P:600 UL (B) 2/3P:300 UL (B)	0°	直插式 弹簧连接	VDE、UL

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG219-3.5	/	1-24	3.5	17.5 IEC 10 UL (B, D)	320 IEC 300 UL (B, D)	0°	直插式 弹簧连接	VDE、UL
	DG212V-THR-3.5/3.81	提供SMT、THR 两种焊接型号	2-24	3.5/3.81	17.5 IEC 12 UL (B) 10 UL (D)	200 IEC 300 UL (B) 300 UL (D)	90°	直插式 弹簧连接	VDE、UL
	DG212R-THR-3.5/3.81	提供SMT、THR 两种焊接型号	2-24	3.5/3.81	17.5 IEC 12 UL (B) 10 UL (D)	200 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG212S-THR-3.5	THR焊接	2-24	3.5	17.5 IEC 12 UL (B) 10 UL (D)	160 IEC 300 UL (B) 300 UL (D)	45°	直插式 弹簧连接	UL
	DG212V-THR-5.0	提供SMT、THR 两种焊接型号	2-24	5.0	17.5 IEC 12 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	90°	直插式 弹簧连接	VDE、UL
	DG212R-THR-5.0	提供SMT、THR 两种焊接型号	2-24	5.0	17.5 IEC 12 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG212S-THR-5.0	THR焊接	2-24	5.0	17.5 IEC 12 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	45°	直插式 弹簧连接	VDE、UL
	DG246-3.81	/	2-24	3.81	9 IEC 10 UL (B, D)	160 IEC 300 UL (B, D)	45°	直插式 弹簧连接	VDE、UL
	DG246-THR-3.81	小体积、紧凑型 45°进线，THR工艺 高度仅12.73mm， 宽度11.6mm	2-12	3.81	17.5 IEC 10 UL(B)	160 IEC 300 UL (B)	45°	直插式 弹簧连接	VDE、UL
	DG246-5.08	/	2-24	5.08	9 IEC 10 UL (B, D)	320 IEC 300 UL (B, D)	45°	直插式 弹簧连接	VDE、UL
	DG246-THR-5.08	小体积、紧凑型 45°进线，THR工艺 高度仅12.73mm， 宽度11.6mm	2-12	5.08	17.5 IEC 10 UL(B)	320 IEC 300 UL (B)	45°	直插式 弹簧连接	VDE、UL
	DG271V-3.5	可用一字螺丝刀 进行操作	1-24	3.5	17.5 IEC 10 UL (B)	200 IEC 300 UL (B)	90°	直插式 弹簧连接	UL
	DG271R-3.5	可用一字螺丝刀 进行操作	1-24	3.5	17.5 IEC 10 UL (B)	200 IEC 300 UL (B)	0°	直插式 弹簧连接	UL
	DG142V-5.0	可用一字螺丝刀 进行操作	1-24	5.0	15 IEC 10 UL (B, C, D)	320 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	/
	DG142V-5.08	可用一字螺丝刀 进行操作	1-24	5.08	15 IEC 10 UL (B, C, D)	250 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL

DEGSON

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG142V-7.62	可用一字螺丝刀 进行操作	1-12	7.62	15 IEC 10 UL (B, C, D)	450 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL
	DG142R-5.08	可用一字螺丝刀 进行操作	2-24	5.08	15 IEC 10 UL (B, C, D)	250 IEC 300 UL (B, C, D)	0°	直插式 弹簧连接	VDE、UL
	DG381A-3.5	/	2*(2-16)	3.5	10 IEC 12 UL (B) 10 UL (D)	130 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG142R-7.62	可用一字螺丝刀 进行操作	2-16	7.62	15 IEC 10 UL (B, C, D)	450 IEC 300 UL (B, C, D)	0°	直插式 弹簧连接	VDE、UL
	DG237-5.08	可用一字螺丝刀 进行操作	2-12	5.08	10 IEC 10 UL (B, D)	320 IEC 300 UL (B, D)	45°	直插式 弹簧连接	VDE、UL
	DG235-3.81/3.96	可用一字螺丝刀 进行操作	2-24	3.81/3.96	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235-5.0	可用一字螺丝刀 进行操作	2-24	5.0	17.5 IEC5 UL (B, D) 5 UL (C)	320 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235-7.5	可用一字螺丝刀 进行操作	2-16	7.5	17.5 IEC 5 UL (B, D) 5 UL (C)	1000 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235-10.0	可用一字螺丝刀 进行操作	2-12	10.0	17.5 IEC 5 UL (B, D) 5 UL (C)	1000 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235W-3.81	可用一字螺丝刀 进行操作	2-24	3.81	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235W-5.0	可用一字螺丝刀 进行操作	2-24	5.0	17.5 IEC 5 UL (B, D) 5 UL (C)	320 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235W-7.5	可用一字螺丝刀 进行操作	2-16	7.5	17.5 IEC 5 UL (B, D) 5 UL (C)	1000 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235W-10.0	可用一字螺丝刀 进行操作	2-12	10.0	17.5 IEC 5 UL (B, D) 5 UL (C)	1000 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235T-5.0	可用一字螺丝刀 进行操作	2-24	5.0	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG235T-7.5	可用一字螺丝刀 进行操作	2-24	7.5	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG235T-10.0	可用一字螺丝刀 进行操作	2-24	10.0	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式 弹簧连接	VDE、UL
	DG250-3.5	可用一字螺丝刀 进行操作	1-24	3.5	5 IEC 8 UL (B, D) 8 UL (C)	450 IEC 300 UL (B, D) 150 UL (C)	45°	直插式 弹簧连接	VDE、UL
NEW	DG250-5.0	可用一字螺丝刀 进行操作	2-24	5.0	10 IEC 8 UL (B, D, F) 8 UL (C)	450 IEC 300 UL (B, D, F) 150 UL (C)	45°	直插式 弹簧连接	/
	DG250-7.0	可用一字螺丝刀 进行操作	2-24	7.0	10 IEC 8 UL (B, C, D)	630 IEC 300 UL (B, C, D)	45°	直插式 弹簧连接	VDE、UL
	DG250T-5.0	可用一字螺丝刀 进行操作	2-24	5.0	12 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	45°	直插式 弹簧连接	VDE、UL
	DG236-3.81	可用一字螺丝刀 进行操作	2-24	3.81	10 IEC 8 UL (B, C, D)	200 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL
	DG236-5.0	可用一字螺丝刀 进行操作	2-24	5.0	10 IEC 8 UL (B, C, D)	400 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL
	DG236-7.5	可用一字螺丝刀 进行操作	2-24	7.5	17.5 IEC 8 UL (B, C, D)	250 IEC 300 UL (B, C, D)	90°	直插式 弹簧连接	VDE、UL
	DG211V-5.0	/	1-24	5.0	15 IEC 8 UL (B, D)	250 IEC 300 UL (B, D)	90°	直插式 弹簧连接	VDE、UL
	DG211R-5.0	/	1-24	5.0	15 IEC 8 UL (B, D)	250 IEC 300 UL (B, D)	0°	直插式 弹簧连接	VDE、UL
	DG234-5.0	可提供连体按钮型号	2-24	5.0	10 IEC 10 UL (B, D)	320 IEC 300 UL (B, D)	0°	直插式 弹簧连接	UL
	DG208-3.5	/	2-24	3.5	9 IEC 8 UL (B, D)	320 IEC 300 UL (B, D)	0°	直插式 弹簧连接	UL
	DG248H2-5.0	/	2*(2-24)	5.0	17.5 IEC 10 UL (B, C, D)	320 IEC 300 UL (B, C, D)	45°	直插式 弹簧连接	/
NEW	DG266-3.5	可用一字螺丝刀 进行操作	2-24	3.5	10 IEC 10 UL (B, D) 10 UL (C)	160 IEC 300 UL (B, D) 50 UL (C)	0°	直插式 弹簧连接	UL
NEW	DG266-5.0	可用一字螺丝刀 进行操作	2*(2-24)	5.0	10 IEC 10 UL (B, D) 10 UL (C)	320 IEC 300 UL (B, D) 50 UL (C)	0°	直插式 弹簧连接	UL

固定式连接器，接线容量达 1.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG332K-5.0	可接插排针	2-24	5.0	12 IEC 10 UL (B)	250 IEC 300 UL (B)	90°	带导线防护 的螺钉连接	UL
	DG332W-5.0	可接插排针	2-12	5.0	12 IEC 10 UL (B,D)	250 IEC 300 UL (B, D)	0°	带夹线体的 螺钉连接	UL
	DG333K-3.5	可接插排针	2-24	3.5	10 IEC 8 UL (B,D)	250 IEC 300 UL (B, D)	0°	带导线防护 的螺钉连接	UL
	DG333J-3.5	/	2-24	3.5	10 IEC 8 UL (B,D)	250 IEC 300 UL (B, D)	90°	波峰焊	UL
	DG251B-3.5	刺破式连接 适配IDC系统	2-24	3.5	6 IEC 4 UL(B)	450 IEC 300 UL(B)	0°	直插式 弹簧连接	VDE
	DG210-3.5	小体积、紧凑型 高度仅12mm， 宽度13mm	1-24	3.5	2 IEC 3 UL(B)	450 IEC 300 UL(B)	0°	直插式 弹簧连接	VDE、UL
	DG247-3.5 DG247-5.0	创新性65°进线	2-24	3.5 5.0	9 IEC 10 UL(B,D)	200 IEC 150 UL(B) 300 UL(D) 450 IEC 300 UL(B)	65°	直插式 弹簧连接	UL

固定式连接器，接线容量达 2.5 mm² (AWG 16)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG307-5.0	/	2/3位，可并排安装	5.0	18 IEC 10 UL (B)	250 IEC 300 UL (B)	0°	带导线防护的螺钉连接	/
	DG300-5.0	/	2/3位，可并排安装	5.0	24 IEC 10 UL (B,D)	250 IEC 300 UL (B, D)	0°	带导线防护的螺钉连接	UL
	DG300-7.5	/	2/3位，可并排安装	7.5	24 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	0°	带导线防护的螺钉连接	VDE、UL
	DG300R-5.0	/	2/3位，可并排安装	5.0	24 IEC 10 UL (B, D)	250 IEC 300 UL (B, D)	90°	带导线防护的螺钉连接	UL
	DG300R-7.5	/	2/3位，可并排安装	7.5	24 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	90°	带导线防护的螺钉连接	VDE、UL
	DG305-5.0	/	2/3位，可并排安装	5.0	20 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	UL
	DG305-7.5	/	2/3位，可并排安装	7.5	20 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	UL
	DG360-7.5	/	2/3位，可并排安装	7.5	24 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	VDE、UL
	DG365-7.5	/	2/3位，可并排安装	7.5	20 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	UL
	DG140V-5.0	/	2-19	5.0	24 IEC 15 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	90°	插片式连接	/
	DG140S-5.0	/	2-19	5.0	24 IEC 15 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	45°	插片式连接	/
	DG140R-5.0	/	2-19	5.0	24 IEC 15 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	插片式连接	/

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG126-5.0	/	2/3位，可并排安装	5.0	18 IEC 10 UL (B)	250 IEC 300 UL (B)	0°	带导线防护的螺钉连接	VDE、UL
	DG126-7.5	/	2-3	7.5	18 IEC 10 UL (B)	450 IEC 300 UL (B)	0°	带导线防护的螺钉连接	VDE、UL
	DG166-5.0	/	2-12	5.0	22 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	VDE、UL
	DG167-5.0	/	2-12	5.0	22 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	VDE、UL
	DG167-7.62	/	2-12	7.62	22 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带导线防护的螺钉连接	VDE、UL
	DG167R-5.0	/	2-12	5.0	22 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带导线防护的螺钉连接	VDE、UL
	DG303S-5.0	/	2/3位，可并排安装	5.0	24 IEC 15 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	45°	带导线防护的螺钉连接	VDE、UL
	DG131-7.5	带测试插孔	2	7.5	18 IEC 20 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	UL
	DG632-5.0	/	2-20	5.0	24 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG632R-5.0	/	2-20	5.0	24 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG330-5.0	提供底部带盖板和不带盖板型号	2/3位，可并排安装	5.0	24 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	45°	带夹线体的螺钉连接	VDE、UL
	DG330-THR-5.0	耐高温材料	2-8	5.0	24 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	45°	带夹线体的螺钉连接	VDE
	DG103-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	55°	带夹线体的螺钉连接	VDE、UL
	DG104-5.08	/	2/3位，可并排安装	5.08	24 IEC 15 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	55°	带夹线体的螺钉连接	VDE、UL
	DG128-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG128-7.5/7.62	/	2/3位，可并排安装	7.5/7.62	18 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG128R-5.0	/	2/3位，可并排安装	5.0	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG128R-7.5	/	2/3位，可并排安装	7.5	18 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG125-5.0	提供底部带盖板和不带盖板型号	2/3位，可并排安装	5.0	18 IEC 16 UL (B)	250 IEC 300 UL (B)	0°	带夹线体的螺钉连接	VDE、UL
	DG125-5.08	提供底部带盖板和不带盖板型号	2/3位，可并排安装	5.08	18 IEC 16 UL (B)	320 IEC 300 UL (B)	0°	带夹线体的螺钉连接	VDE、UL
	DG500-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500-7.62	/	2/3位，可并排安装	7.62	18 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG503-5.08	/	2/3位，可并排安装	5.08	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG504-5.08	提供底部带盖板和不带盖板型号	2/3位，可并排安装	5.08	20 IEC 20 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	50°	带夹线体的螺钉连接	VDE、UL
	DG500H-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500HH-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500A-5.0/5.08	提供高低位分离式和整体式型号	4/6位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500B-5.0/5.08	/	4/6位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500AA-5.0/5.08	/	4/6位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG500BB-5.0/5.08	/	4/6位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL

DEGSON

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG500A3-5.0/5.08	/	6/9位，可并排安装	5.0/5.08	18 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG129-5.0/5.08	提供底部带盖板和不带盖板型号	2/3位，可并排安装	5.0/5.08	20 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG129-7.5/7.62	提供底部带盖板和不带盖板型号	2/3位，可并排安装	7.5/7.62	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG126-5.0	/	2/3位，可并排安装	5.0	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式弹簧连接	VDE、UL
	DG126-7.5	/	2-3	7.5	10 IEC 5 UL (B, D) 5 UL (C)	250 IEC 300 UL (B, D) 150 UL (C)	0°	直插式弹簧连接	VDE、UL
	DG166-5.0	/	2-12	5.0	5 IEC 8 UL (B, D) 8 UL (C)	450 IEC 300 UL (B, D) 150 UL (C)	45°	直插式弹簧连接	VDE、UL
	DG129R-5.0/5.08	提供带盖板和不带盖板型号	2/3位，可并排安装	5.0/5.08	20 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG129R-7.5/7.62	提供带盖板和不带盖板型号	2/3位，可并排安装	7.5/7.62	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	90°	带夹线体的螺钉连接	VDE、UL
	DG130-5.0/5.08	/	2/3位，可并排安装	5.0/5.08	20 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG130-7.5/7.62	/	2/3位，可并排安装	7.5/7.62	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	UL
	DG130H-5.0	高型设计	2/3位，可并排安装	5.0	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	/
	DG130A-5.0	提供层间错位和不错位型号	4/6位，可并排安装	5.0	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG130A-5.08	/	4/6位，可并排安装	5.08	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG130A-E-5.08	底部带盖板，接线孔之间隔板加长	4/6位，可并排安装	5.08	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	UL
	DG130A3-5.08	/	2/3位，可并排安装	5.08	20 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	VDE、UL

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG105R-5.0	提供不同的 前后排针	2-24	5.0	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉 连接	VDE、UL
	DG105R-7.5	提供不同的 前后排针	2-16	7.5	24 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉 连接	VDE、UL
	DG105V-5.0	提供不同的 前后排针	2-24	5.0	24 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	正面螺钉 连接	VDE、UL
	DG105V-7.5	提供不同的 前后排针	2-16	7.5	24 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	90°	正面螺钉 连接	VDE、UL
	DSMT2.5-5.08	带测试插孔 的分断端子	1-32	5.08	15 IEC 15 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	/
	DG130LF-5.0 DG130RF-5.0	左侧和右侧 两种型号	2-4	5.0	24 IEC 20 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	/
	DG636LF-7.5 DG636RF-7.5	左侧和右侧 两种型号	3	7.5	24 IEC 20 UL (B, C) 5 UL (D)	630 IEC 300 UL (B, C) 600 UL (D)	0°	带夹线体的 螺钉连接	/
	DG242V-5.0/5.08	/	1-24	5.0/5.08	17 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	90°	回拉式 弹簧连接	VDE、UL
	DG242V-7.5/7.62	/	1-24	7.5/7.62	17 IEC 15 UL (B) 10 UL (D)	750 IEC 300 UL (B) 300 UL (D)	90°	回拉式 弹簧连接	VDE、UL
	DG242V-10.0	/	1-16	10.0	17 IEC 15 UL (B) 10 UL (D)	1000 IEC 300 UL (B) 300 UL (D)	90°	回拉式 弹簧连接	VDE、UL
	DG242R-5.0	/	1-24	5.0	17 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	回拉式 弹簧连接	VDE、UL
	DG242R-7.5	/	2-24	7.5	17 IEC 15 UL (B) 10 UL (D)	750 IEC 300 UL (B) 300 UL (D)	0°	回拉式 弹簧连接	VDE、UL
	DG242R-10.0	/	2-16	10.0	17 IEC 15 UL (B) 10 UL (D)	1000 IEC 300 UL (B) 300 UL (D)	0°	回拉式 弹簧连接	VDE、UL
	DG243-5.0	/	1-24	5.0	17 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL
	DG243-7.5	/	2-24	7.5	17 IEC 15 UL (B) 10 UL (D)	750 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL

DEGSON

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG243-10.0	/	2-11	10.0	17 IEC 15 UL (B) 10 UL (D)	1000 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL
	DG245-5.0	/	1-24	5.0	17 IEC 15 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL
	DG245-5.08	/	1-24	5.08	17 IEC 15 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	UL
	DG245-7.5/7.62	/	1-16	7.5/7.62	17 IEC 15 UL (B) 10 UL (D)	750 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL
	DG245-10.0	/	1-12	10.0	17 IEC 15 UL (B) 10 UL (D)	1000 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹簧连接	VDE、UL
	DG245H2-5.0	/	2*(1-24)	5.0	18 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	45°	回拉式 弹簧连接	VDE、UL
	DG245H3-5.0	/	3*(1-24)	5.0	18 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	45°	回拉式 弹簧连接	VDE、UL
	DG245H3-7.5	/	3*(1-16)	7.5	21 IEC 10 UL (B, D)	630 IEC 300 UL (B, D)	45°	回拉式 弹簧连接	UL
	DG245H4-5.0	/	4*(1-24)	5.0	18 IEC 10 UL (B, D)	450 IEC 300 UL (B, D)	45°	回拉式 弹簧连接	VDE、UL
	DG202-5.0	/	2-24	5.0	16 IEC 12 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG202-7.5	/	2-16	7.5	16 IEC 12 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG202-10.0	/	2-16	10.0	16 IEC 12 UL (B) 10 UL (D)	750 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG204-5.0	/	1-24	5.0	20 IEC 12 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	90°	回拉式 弹簧连接	VDE
	DG204-7.5	/	2-16	7.5	20 IEC 12 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	90°	回拉式 弹簧连接	VDE
	DG205-5.0	/	2-24	5.0	24 IEC 12 UL (B)	320 IEC 300 UL (B)	45°	直插式 弹簧连接	/

固定式连接器，接线容量达 2.5 mm² (AWG 14)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	2EDGKDSV-5.0	/	2-24	5.0	20 IEC 12 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	90°	直插式 弹簧连接	/
NEW	DGPS2.5R-5.0	PUSH-SNAP技术	2-12	5.0	20 IEC 15 UL(B) 10 UL(D)	400 IEC 300 UL (B) 300 UL (D)	0°	触联弹簧 连接	VDE、UL
NEW	DGPS2.5FR-5.0	PUSH-SNAP技术	2-12	5.0	20 IEC 15 UL(B) 10 UL(D)	400 IEC 300 UL (B) 300 UL (D)	0°	触联弹簧 连接	/
NEW	DGPS2.5FV-5.0	PUSH-SNAP技术	2-12	5.0	20 IEC 15 UL(B) 10 UL(D)	400 IEC 300 UL (B) 300 UL (D)	90°	触联弹簧 连接	/
NEW	DG209-5.0	TWIN连接	2-12	5.0	24 IEC 15 UL(B) 10 UL(D)	400 IEC 300 UL (B) 300 UL (D)	45°	直插式弹簧 连接	VDE、UL
	DG046-5.0	桥接件	2-10	5.0	20 UL (B)	/	/	配套 DG262-5.0	/
	DG046-10.0	桥接件	2-5	10.0	20 UL (B)	/	/	配套 DG262-5.0	/
	DG331-5.0	可卡接到设备外壳中， 与排针连接	2-20	5.0	12 IEC 10 UL (B)	250 IEC 300 UL (B)	0°	带导线防护 的螺钉连接	UL
	DG335W-5.0	可接插排针	2-12	5.0	12 IEC 10 UL (B, D)	320 IEC 300 UL (B, D)	0°	带导线防护 的螺钉连接	UL
	DG332J-5.0	可提供弯针型号	2-24	5.0	12 IEC 10 UL (B, D)	250 IEC 300 UL (B, D)	90°	波峰焊	UL
NEW	DG332J-THR-5.0	耐高温塑料	2-24	5.0	12 IEC 10 UL (B, D)	250 IEC 300 UL (B, D)	90°	回流焊	/
NEW	DG332JR-5.0	/	2-24	5.0	12 IEC 10 UL (B, D)	250 IEC 300 UL (B, D)	0°	波峰焊	/
NEW	DG213-5.0	带操作扳手， 可免工具操作	1-24	5.0	18 IEC 12 UL (B)	450 IEC 300 UL (B)	0°	直插式 弹簧连接	VDE

固定式连接器，接线容量达 4 mm² (AWG 12)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG302-5.0	/	2/3位，可 并排安装	5.0	25 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	0°	带导线防护 的螺钉连接	VDE、UL
	DG302-7.5	/	2/3位，可 并排安装	7.5	25 IEC 20 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带导线防护 的螺钉连接	VDE、UL
	DG302R-5.0	/	2/3位，可 并排安装	5.0	25 IEC 20 UL (B) 10 UL (D)	250 IEC 300 UL (B) 300 UL (D)	90°	带导线防护 的螺钉连接	VDE、UL
	DG302R-7.5	/	2/3位，可 并排安装	7.5			90°	带导线防护 的螺钉连接	VDE、UL
	DG635-6.35	/	2/3位，可 并排安装	6.35	32 IEC 30 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG636S-6.35	/	2/3位，可 并排安装	6.35	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	55°	带夹线体的 螺钉连接	UL
	DG636S-9.52	/	2/3位，可 并排安装	9.52	32 IEC 30 UL (B, C) 5 UL (D)	1000 IEC 300 UL (B, C) 600 UL (D)	55°	带夹线体的 螺钉连接	UL
	DG636-6.35	/	2/3位，可 并排安装	6.35	24 IEC 30 UL (B) 10 UL (D)	450 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG636-7.62	/	2/3位，可 并排安装	7.62	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG636-9.52	/	2/3位，可 并排安装	9.52	32 IEC 30 UL (B) 10 UL (D)	1000 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG637-6.35	带Z形针脚， 适用于600V UL场合	2-16	6.35	32 IEC 30 UL (B, C) 5 UL (D)	630 IEC 600 UL (B, C) 600 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG638-9.52	带Z形针脚， 适用于600V UL场合	2/3位，可 并排安装	9.52	32 IEC 30 UL (B, C) 5 UL (D)	1000 IEC 300/600 UL (B, C) 600 UL (D)	0°	带夹线体的 螺钉连接	UL
	DG950-9.5	/	2/3位，可 并排安装	9.5	26 IEC 30 UL (B, C) 10 UL (D)	750 IEC 300 UL (B, C) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	PS4-7.5	/	1-16	7.5	32 IEC 25 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL

固定式连接器，接线容量达 4 mm² (AWG 12)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG260-7.5	/	1-16	7.5	32 IEC 30 UL (B, C) 10 UL (D)	630 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	/
	DG260-10.0	/	2-8	10.0	32 IEC 30 UL (B, C) 10 UL (D)	630 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	/
	DG262-5.0	/	1-24	5.0	32 IEC 20 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹片连接	UL
	DG262-7.5	/	1-16	7.5	32 IEC 20 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹片连接	UL
	DG271V-5.0	可用一字螺丝刀 进行操作	1-24	5.0	24 IEC 20 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	90°	直插式 弹簧连接	VDE、UL
NEW	DG271V-THR-5.0	适用THR工艺	1-24	5.0	24 IEC 20 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	90°	直插式 弹簧连接	UL
	DG271R-5.0	可用一字螺丝刀 进行操作	1-24	5.0	24 IEC 20 UL (B) 10 UL (D)	400 IEC 300 UL (B) 300 UL (D)	0°	直插式 弹簧连接	VDE、UL

固定式连接器，接线容量达 6 mm² (AWG 10)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG263-7.5	/	1-16	7.5	41 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹片连接	VDE
	DG263-10.0	/	1-16	10.0	41 IEC 30 UL (B, C) 10 UL (D)	1000 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	VDE
	DG271V-7.5	可提供带Z形针脚的型号， 适用于600 V UL场合	1-24	7.5	41 IEC 40 UL (B) 40 UL (C) 5 UL (D)	1000 IEC 600 UL (B) 600 UL (C) 600 UL (D)	90°	直插式 弹簧连接	VDE、UL
	DG271R-7.5	可提供带Z形针脚的型号， 适用于600 V UL场合	1-24	7.5	41 IEC 40 UL (B) 40 UL (C) 5 UL (D)	1000 IEC 600 UL (B) 600 UL (C) 600 UL (D)	0°	直插式 弹簧连接	VDE、UL
	DG636A-6.35	/	4/6位，可 并排安装	6.35	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的 螺钉连接	/
	DG107R-6.35	/	1-24	6.35	41 IEC 30 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉 连接	UL
	DG107R-7.62	/	1-16	7.62	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉 连接	UL
	DG107V-7.62	/	2-16	7.62	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	90°	正面螺钉 连接	UL
	DG263-7.5	/	1-16	7.5	41 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	45°	回拉式 弹片连接	VDE
	DG263-10.0	/	1-16	10.0	41 IEC 30 UL (B, C) 10 UL (D)	1000 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	VDE
	DG271V-7.5	可提供带Z形针脚的型号， 适用于600 V UL场合	1-24	7.5	41 IEC 40 UL (B) 40 UL (C) 5 UL (D)	1000 IEC 600 UL (B) 600 UL (C) 600 UL (D)	90°	直插式 弹簧连接	VDE、UL
	DG271R-7.5	可提供带Z形针脚的型号， 适用于600 V UL场合	1-24	7.5	41 IEC 40 UL (B) 40 UL (C) 5 UL (D)	1000 IEC 600 UL (B) 600 UL (C) 600 UL (D)	0°	直插式 弹簧连接	VDE、UL

固定式连接器，接线容量达 6 mm² (AWG 10)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG636A-6.35	/	4/6位，可并排安装	6.35	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	带夹线体的螺钉连接	/
	DG107R-6.35	/	1-24	6.35	41 IEC 30 UL (B) 10 UL (D)	320 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉连接	UL
	DG107R-7.62	/	1-16	7.62	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	0°	正面螺钉连接	UL
	DG107V-7.62	/	2-16	7.62	32 IEC 30 UL (B) 10 UL (D)	630 IEC 300 UL (B) 300 UL (D)	90°	正面螺钉连接	UL

固定式连接器，接线容量达 10 mm² (AWG 8)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG135T-10.16	带Z形针脚， 适用于600V UL场合	2/3位，可并排安装	10.16	57 IEC 52 UL (B, C) 5 UL (D)	750 IEC 300 UL (B, C) 600 UL (D)	0°	带夹线体的螺钉连接	VDE、UL
	DG135T-HV-10.16	满足UL-F级600V	2/3位，可并排安装	10.16	57 IEC 52 UL (B, C) 5 UL (D)	750 IEC 300 UL (B, C) 600 UL (D)	0°	带夹线体的螺钉连接	UL
	PS10	穿墙连接器的焊针 可以同排或交错	1-12	10.0	57 IEC 70 UL (B, C) 10 UL (D)	450 IEC 600 UL (B, C) 300 UL (D)	0°	带导线防护的螺钉连接	VDE、UL
	PS10-PE	穿墙连接器的焊针 可以同排或交错	1-12	10.0	-	-	0°	带导线防护的螺钉连接	VDE、UL

固定式连接器，接线容量达 16 mm² (AWG 6)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG136T-10.16	带Z形针脚， 适用于600V UI场合	2/3位，可 并排安装	10.16	57 IEC 52 UL (B, C)	750 IEC 300 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG136T-12.7	提供高扭力型号	2-12	12.7	65 IEC 60 UL (B, C)	1000 IEC 600 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG136HT-10.16	/	1-12	10.16	65 IEC 60 UL (B, C) 10 UL (D)	1000 IEC 300 UL (B, C) 300 UL (D)	0°	带夹线体的 螺钉连接	VDE、UL
	DG136HT-12.7	/	2-12	12.7	65 IEC 60 UL (B, C)	1000 IEC 600 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG138T-10.16	带Z形针脚， 适用于600V UI场合	2-12	10.16	76 IEC 60 UL (B, C)	1000 IEC 600 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG138T-12.7	带Z形针脚， 适用于600V UI场合	2-12	12.7	76 IEC 60 UL (B, C)	1000 IEC 600 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG264-10.0	/	1-16	10.0	76 IEC 66 UL (B, C) 10 UL (D)	320 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	UL
	DG264-15.0	/	2-12	15.0	76 IEC 66 UL (B, C) 10 UL (D)	1000 IEC 300 UL (B, C) 300 UL (D)	45°	回拉式 弹片连接	UL
	DG270-10.0	可提供带Z形针脚的型 号，适用于600ＶUl场合	1-12	10.0	76 IEC 51 UL (B) 51 UL (C) 10 UL (D)	400 IEC 300 UL (B) 150 UL (C) 300 UL (D)	0°	回拉式 弹片连接	/
	DG271V-10.0	/	2-24	10.0	76 IEC 70 UL (B, C) 5 UL (D)	1000 IEC 600 UL (B, C) 600 UL (D)	90°	直插式 弹簧连接	VDE、UL
	DG271V-20.0	可用一字螺丝刀 进行操作	2-6	20.0	76 IEC 70 UL (B)	1000 IEC 600 UL (B)	90°	直插式 弹簧连接	VDE、UL
	DG271V-30.0	可用一字螺丝刀 进行操作	2-16	30.0	76 IEC 70 UL (B)	1000 IEC 600 UL (B)	90°	直插式 弹簧连接	VDE、UL
	DG271R-10.0	/	2-24	10.0	76 IEC 70 UL (B, C) 5 UL (D)	1000 IEC 600 UL (B, C) 600 UL (D)	0°	直插式 弹簧连接	VDE、UL

固定式连接器，接线容量达 35 mm² (AWG 2)

图 片	产品系列	说 明	位数(P)	针距(mm)	电流(A)	电压(V)	接线方向	连接方式	认证
	DG137T-15.0 DG137TM-15.0	可带或不带法兰 可提供单侧带法兰型号	1-9	15.0	115 IEC 115 UL (B, C)	1000 IEC 600 UL (B, C)	0°	带夹线体的 螺钉连接	VDE、UL
	DG271V-15.0	/	1-6	15.0	125 IEC 101 UL (B, C)	1000 IEC 600 UL (B, C)	90°	直插式 弹簧连接	UL